

MY IRRIGACIO WORLD

IRRIWORLD[®]






WINKIT[®]

जीत किसान की[®]




UNPACK | LINK | IRRIGATE

COMPONENTS IN WINKIT

ITEM	ITEM NAME	UNIT	QUANTITY
	IRRIFLEX™ PIPE	mtr	60
	ADAPTOR BASE WITH 3/4" FEMALE OUTLET	nos	7
	IRRIFLEX™ PLAIN ADAPTOR	nos	14
	WINKLER RISER (30CM 3/4" MALE X FEMALE TH)	nos	21
	WINKLER 3/4"	nos	7
	SS CLAMP FOR IRRIFLEX PIPE	nos	16
	IRRIFLEX™ MTA	nos	1
	IRRIFLEX™ END CAP	nos	1
	T- SPANNER	nos	1

WINKLER + IRRIFLEX INSTALLATION




1 OPEN THE IRRIFLEX PIPE ROLL.



2 LAY IRRIFLEX ON PLAIN GROUND UNTIL YOU REACH THE LENGTH REQUIRED (RECOMMENDED LENGTH 8 METERS BETWEEN TWO WINKLER).




3 CUT 6 PIECES OF 8 METER LENGTH EACH.




4 CUT 1 PIECE OF 1 METER AND 1 PIECE OF 11 METERS LEFTOVER.




5 CONNECT THE IRRIFLEX PLAIN ADAPTOR TO THE IRRIFLEX PIPE OF 8 METERS LENGTH ON BOTH SIDES.



a) Insert the metal clamp onto the IRRIFLEX pipe.

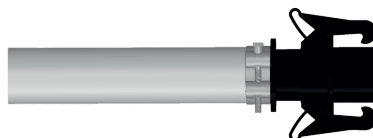

b) Make sure that the IRRIFLEX pipe is inserted all the way to the IRRIFLEX male connector's shoulder, and ensure that there is no gap between the adaptor shoulder & clamp.

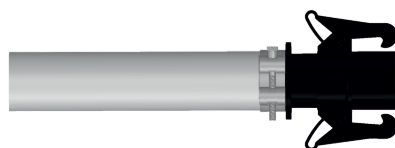

c) Make sure that the attachment screw is on the white side of IRRIFLEX.




d) Use the T-spanner (provided in the box) to tighten the bolt.


6 CONNECT THE IRRIFLEX PLAIN ADAPTOR TO THE IRRIFLEX PIPE OF 1 METER CUT LENGTH ON ONE SIDE AND END CAP ON ANOTHER SIDE.

7 CONNECT THE IRRIFLEX PLAIN ADAPTOR TO THE IRRIFLEX PIPE OF 11 METER CUT LENGTH ON ONE SIDE AND MTA ON ANOTHER SIDE.

ASSEMBLING THE ADAPTOR BASE WINKLER SET



- 8 TAKE ADAPTOR BASE AND PLACE IT ON A PLAIN SURFACE.




- 9 INSERT THE PLASTIC RISER MALE THREAD END INTO THE ADAPTOR BASE.



- 10 INSERT THE SECOND RISER MALE THREAD INTO THE FIRST RISER FEMALE END (TWO - THREE RISER PER ADAPTOR BASE).




- 11 INSTALL WINKLER INTO THE RISER FEMALE END (THIS IS THE ADAPTOR BASE, RISER & WINKLER ASSEMBLY).

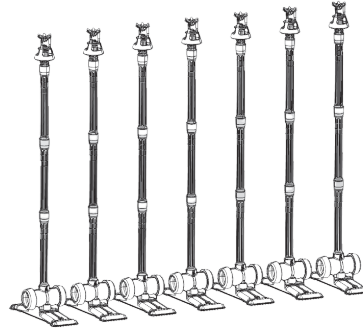

- 12 REPEAT STEP 8 TO 11 FOR ALL REQUIRED SET OF ADAPTOR BASE, RISER WITH WINKLER.

CONNECTING ADAPTOR BASE AND WINKLER WITH IRRIFLEX



- 13 CONNECT THE ADAPTOR BASE WINKLER SET TO THE IRRIFLEX PIPES WITH ADAPTORS. PRESS QUICKFIT TYPE CLAMP BY HAND.



- 15 CONNECT THE ASSEMBLED WINKLER SET WITH THE PUMP/WATER SOURCE WITH REQUIRED LENGTH OF IRRIFLEX PIPE. (STEP 7)



- 14 AT THE END OF THE SPRINKLER SYSTEM- CONNECT THE LAST ADAPTOR BASE WITH IRRIFLEX END CAP.




- 16 USE A SUITABLE IRRIFLEX ADAPTOR TO CONNECT TO THE PUMP/WATER SOURCE.

WINKLER



Ideal for irrigating pastures, tubular crops, pulses, horticulture, and floriculture. The Winkler maximizes the area of coverage, making it perfect for under tree applications and nursery canopy setups.

IRRIFLEX™ - LIGHT WEIGHT FOLDABLE PIPE



A revolutionary leak-proof flexible mainline and manifold piping solution that's foldable, movable and affordable.

- Coil Length; 60 meters.
- 100% recyclable polypropylene, UV and chemical resistant.

BENEFITS



VARIED
SPACING



HIGHLY
FLEXIBLE
DESIGN



EXCELLENT
WATER
DISTRIBUTION




MINIMUM
LABOUR
REQUIRED



EASY TO
TRANSPORT
& STORE



LEAK-FREE
WITH NO
RUSTING

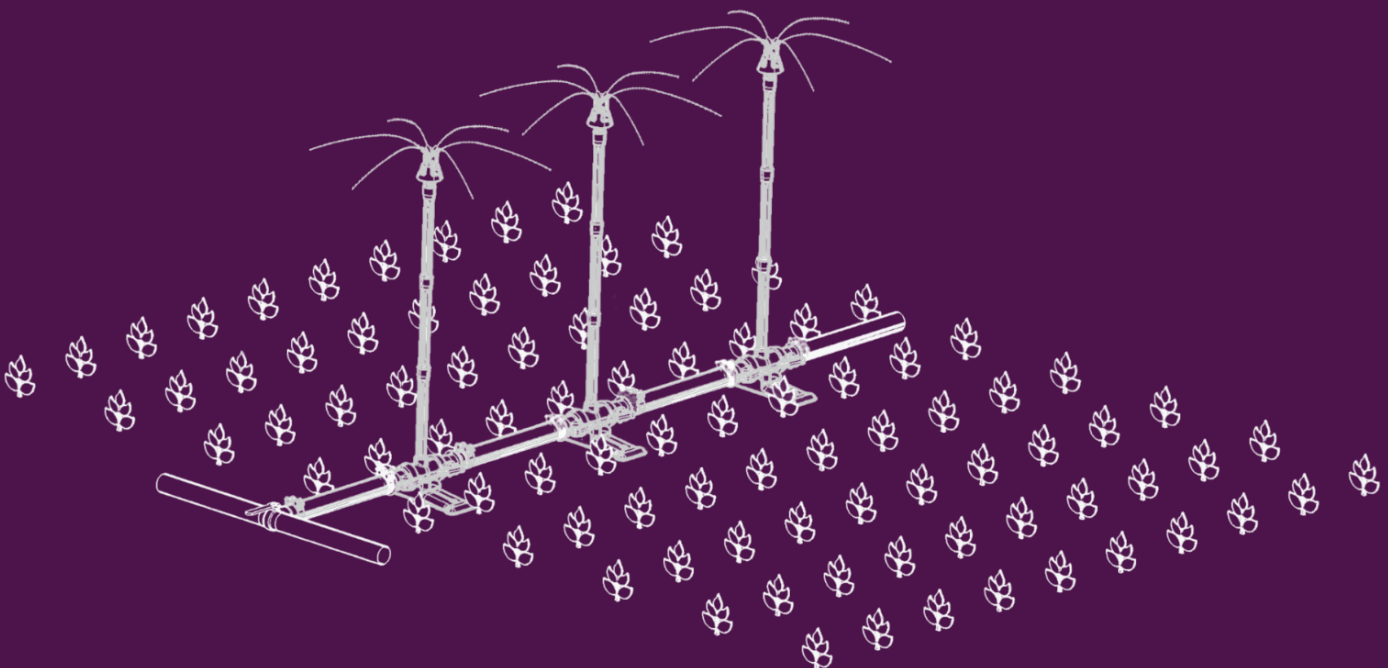

MY IRIGACIO WORLD PVT. LTD.

Working Towards Making Irrigation Smarter...